


2 MP Network IR Water-proof Bullet Camera




Features

- 2MP (1920 × 1080) full real time coding
- Max. resolution: 1920 × 1080
- ICR auto switch, true day / night
- 10 ~ 20m IR night view distance
- 3D DNR, physical WDR
- Smart analysis including object removal, line crossing detection and intrusion detection, etc.
- ROI coding
- Support CVBS video output and one-way audio
- PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

Dimensions

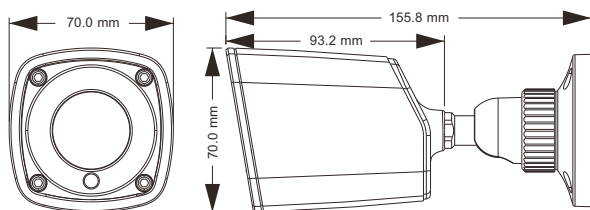

Available Accessories

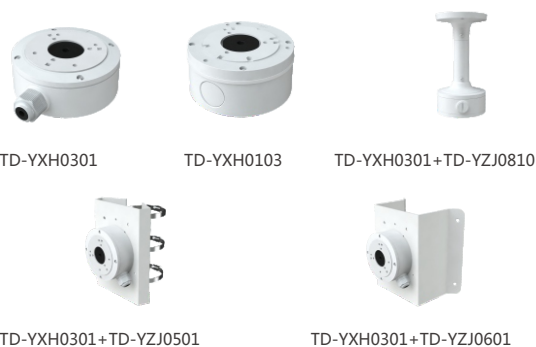

TD-YXH0301 TD-YXH0103 TD-YXH0301+TD-YZJ0810

TD-YXH0301+TD-YZJ0501 TD-YXH0301+TD-YZJ0601

Specifications

Specifications	Model	TD-9421E2
Camera		
Image Sensor		1 / 2.7 "CMOS
Image Size		1920 × 1080
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Iris Type		Fixed Iris
Min. Illumination		0.05 lux @F1.2,AGC ON; 0 lux with IR
Lens		3.6 mm@F1.6, horizontal field of view: 80.3° (2.8 mm optional)
Lens Mount		M12
Day & Night		ICR
Wide Dynamic Range		120dB
Digital NR		3D DNR
Angle Adjustment		Any Angle
Image		
Video Compression		H.265 / H.264 / MJPEG
H.265 Compression Standard		Main Profile @Level4.1 High Tier
Resolution		1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream		60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit Rate		128 Kbps ~ 6 Mbps
Bit Rate Type		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, Antiflicker, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Audio		MIC IN × 1
Video Output		CVBS video output (BNC × 1)
Functions		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T/28181-2011
Storage		Network remote storage
Smart Alarm		Motion alarm
Smart Analysis		Object removal detection, line crossing detection and intrusion detection, etc.
PoE		Yes
IR Distance		10 ~ 20 m
Ingress Protection		IP66
Others		
Power Supply		DC12V / PoE
Power Consumption		< 2W
IR Consumption ON		< 4W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % relative humidity
Dimensions (mm)		Φ70 × 156
Weight (net)		368g
Installation		Wall mounting, pendent mounting

Available Model

Available Model	TD-9421E2 (D / PE / IR1)
-----------------	----------------------------