



2 MP Network IR Water-proof Dome Camera

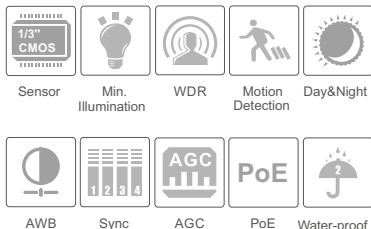

Features

- 1080P (1920 x 1080) full real time coding
- Max. resolution: 1920 x 1080
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- Support three streams

Dimensions

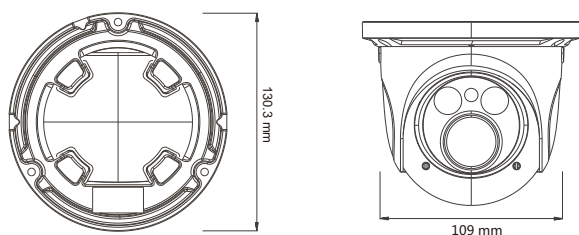

Available Accessories



TD-YXH0201 TD-YZJ0802 TD-YZJ0402

Specifications

Model	TD-9525E	
Specifications		
Camera		
Image Sensor	1 / 3 "CMOS	
Image Size	1920 x 1080	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Min. Illumination	0 Lux (IR LED ON)	
Lens	6 mm (3.6 mm, 8 mm, 2.8 ~ 12 mm optional)	
Lens Mount	CS	Φ14
Image		
Video Compression	H.264 / MJPEG	
Resolution	1080P (1920 x 1080) 、 720P (1280 x 720) 、 D1、 CIF、 480 x 240	
Multi-stream	1920 x 1080 (1 ~ 30fps) / 1280 x 720 (1 ~ 30fps) 1280 x 720 (1 ~ 10fps) / D1 (1 ~ 30fps) / CIF (1 ~ 30fps) CIF (1 ~ 30fps) / 480 x 240 (1 ~ 30fps)	
Bit rate	64 Kbps ~ 8 Mbps	
Encode Mode	VBR / CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	Corridor Mode, ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser	
Interfaces		
Network	RJ45	
Functions		
Remote Monitoring	IE browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission	
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP	
Storage	Network remote storage	
Smart Alarm	Motion Alarm	
Day & Night	ICR	
PoE	Yes	
IR Distance	20 ~ 30m	
Water-proof	IP66	
Others		
Power Supply	DC 12V / PoE	
Power Consumption	< 2.5W	
IR Consumption ON	< 6W	
Operating Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % humidity	
Dimensions (mm)	Φ109 × 130	
Weight (net)	702 g	

Available Model

Available Model	TD-9525E (D / PE / AR2)
	TD-9525E (D / FZ / PE / AR2)